
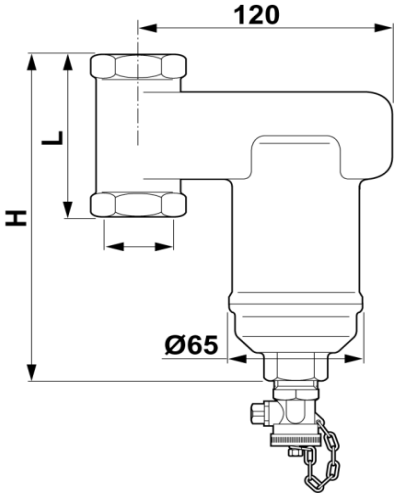


SPIROTECH SPECIFICATION SHEET		SPIROTECH 	
Version 16.1 / BDB			
Product: SpiroTrap Vertical 3/4" Threated fitting		Type: AE075V	
Customer:			
Project:		Date: 16-3-2016	
Reference:			
Design criteria		Drawing:	
Medium: Water / glycol (max 50%)			
Max. flow velocity: 1 m/s			
Max. flow rate: 1,3 m3/h			
Max. pressure: 10 bar-g			
Max. temperature: 110 °C			
Design standard: EN 13445			
Testing and quality assurance			
Leakage test: no			
Test certificate: no			
Design and manufacturing acc. 97/23/EC: yes			
Material certificates (structural parts): no			
Drawing: no			
Construction materials		Dimensions:	
Body: Brass		d 3/4"	
Drain valve: Brass		H1 172 mm	
Spirotube Tube: S235 JR G2 (St.37)		L 84 mm	
Wire: Copper			
Solder: Tin(SnCu3)			
		Volume: 0,32 ltr	
		Dry weight (approx): 1,8 kg	
		Subject to changes	