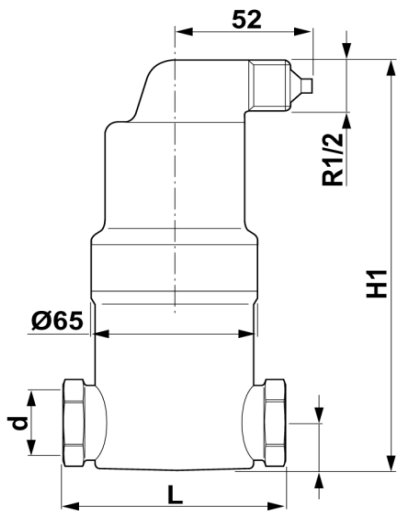


SPIROTECH SPECIFICATION SHEET		SPIROTECH 	
Version 16.1 / BDB			
Product: SpiroVent special 1 1/4" Threated fitting		Type: AA125-R004	
Customer:			
Project:		Date: 16-3-2016	
Reference:			
Design criteria		Drawing:	
Medium:	Acc. supplier info		
Max. flow velocity:	1 m/s		
Max. flow rate:	3,60 m3/h		
Max. pressure:	25 bar-g		
Max. temperature:	200 °C		
Design standard:	EN 13445		
Testing and quality assurance			
Leakage test:	yes		
Test certificate:	no		
Design and manufacturing acc. 97/23/EC:	yes		
Material certificates (structural parts):	no		
Drawing:	no		
Construction materials		Dimensions:	
Body:	AISI316	d	1 1/4"
Deaeration cap:	AISI316	H1	222 mm
Valve sealing:	Viton	h1	40 mm
Float:	TPX	L	88 mm
Spirotube Tube:	AISI316		
Wire:	AISI316		
Solder:	Tin(SnCu3)		
		Volume:	0,25 ltr
		Dry weight (approx):	1,6 kg
		Subject to changes	