
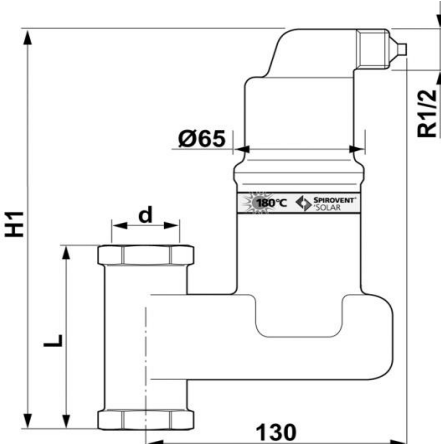


SPIROTECH SPECIFICATION SHEET		SPIROTECH 	
Version 17.10 / BDB			
Product: SpiroVent Solar Vertical 22 mm Compression fitting		Type: AA022V/008	
Customer: 1		Date: 2/26/2018	
Project: 2			
Reference: 3			
Design criteria		Drawing:	
Medium:	Water / glycol (max 50%)		
Max. flow velocity:	1 m/s		
Max. flow rate:	0.35 l/s		
Max. pressure:	10 bar-g		
Max. temperature:	180 °C		
Design standard:	EN 13445		
Testing and quality assurance			
Leakage test:	no		
Test certificate:	no		
Design and manufacturing acc. 2014/68/EU:	yes		
Material certificates (structural parts):	no		
Drawing:	no		
Construction materials		Dimensions:	
Body:	Brass	d	22 mm
Deaeration cap:	Brass	H1	220 mm
Valve sealing:	Viton	L	104 mm
Float:	TPX		
Spirotube Tube:	Copper		
Wire:	Copper		
Solder:	Tin(SnCu3)	Volume:	0.32 ltr
		Dry weight (approx):	2 kg
		Subject to changes	