
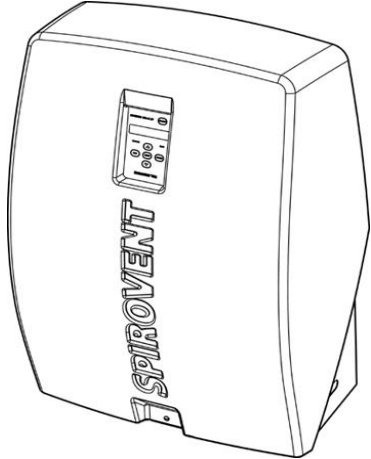


<b>SPIROTECH SPECIFICATION SHEET</b>		<b>SPIROTECH</b> 	
Version 16.1 / BDB			
Product: SpiroVent Superior		Type:	S6A MA06A50W
Customer:		Date:	18-3-2016
Project:			
Reference:			
<b>Design criteria</b> Medium: Water / glycol (max 40%) Max system volume: 300 m3 Min. Pressure: 1 bar-g Max. pressure: 6 bar-g Min. Temperature: 0 °C Max. temperature: 90 °C Ambient temperature: 0-40 °C Refill fluid: N.A.  <b>Connections (flexible):</b> Inlet / outlet: G3/4" Refill: N.A.  Main pump: Vertical multistage Back-up pump: N.A.		<b>Drawing:</b> 	
<b>Testing and quality assurance</b> Running test: yes Test medium: Water High voltage test: yes Test certificate: no CE-marking: yes Material certificates (structural parts): no		<b>Dimensions &amp; weight:</b> Length: 880 mm Width: 590 mm Depth: 350 mm Dry weight (approx): 57 kg	
<b>Construction materials</b> Vessel: S235 (St.37) Fittings / pipes: Copper / Brass Pump: AISI316 Deaeration cap: Brass Valve sealing: Viton Float: PP Casing: Synthetic (PS) Color: Yellow (RAL 1003)		<b>Power supply:</b> Voltage: 230V / 50-60Hz Power consumption: 1,15 kW Protection level: IP44	
		<b>B.M.S. Contacts:</b> Release / off: 24 VAC Ready & failure: Voltage free Refill: N.A.  Remote refill: N.A.	
Subject to changes			