

SPIROTECH SPECIFICATION SHEET



Version 17.10 / BDB

Product: SpiroVent Solar Vertical AutoClose
22 mm Compression fitting

Type: AA022VFBA08

Customer: 1

Project: 2


Date: 2/26/2018

Reference: 3

Design criteria

Medium: Water / glycol (min 20% / max.50%)
 Max. flow velocity: 1 m/s
 Max. flow rate: 0.35 l/s
 Max. pressure: 10 bar-g
 Max. temperature: 180 °C
 closing temperature: 100 °C
 Design standard: EN 13445

Drawing:

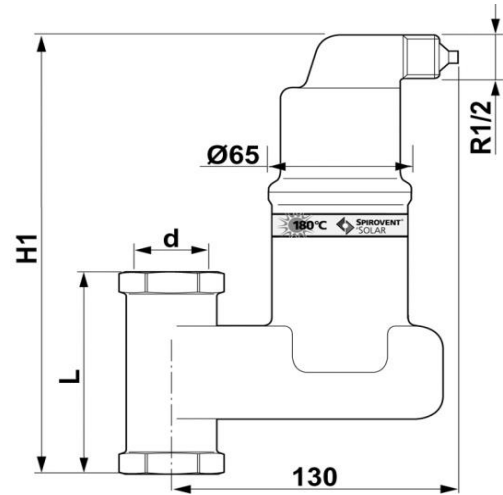

Testing and quality assurance

Leakage test: yes
 Test certificate: no
 Design and manufacturing acc. 2014/68/EU: yes
 Material certificates (structural parts): no
 Drawing: no

Construction materials

Body: Brass
 Deaeration cap: Brass
 Valve sealing: Viton
 Float: TPX
 Spirotube Tube: Copper
 Wire: Copper
 Solder: Tin(SnCu3)

Dimensions:

d 22 mm
 H1 220 mm
 L 104 mm

Volume: 0.32 ltr
 Dry weight (approx): 2 kg

Subject to changes