
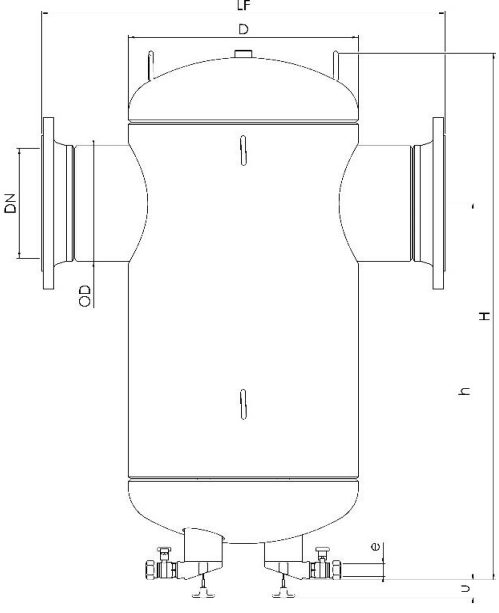


SPIROTECH SPECIFICATION SHEET		SPIROTECH 	
Version 17.10 / BDB			
Product: SpiroTrap Magnet DN 200 Flanged end		Type: BE200FM	
Customer: 1		Date: 2/23/2018	
Project: 2			
Reference: 3			
Design criteria Medium: Water / glycol (max 50%) Nom. flow velocity: 1.5 m/s Nom. flow rate: 50.0 l/s Max. pressure: 10 bar-g Max. temperature: 110 °C Δp at nom. flow: 5.8 kPa Flow: 1.5 l/s Δp at flow: 0.0 kPa Design standard: EN 13445		Drawing: 	
Testing and quality assurance Test pressure (bar): 7 Test medium: Air Test certificate: no Design and manufacturing acc. 2014/68/EU: yes Material certificates (structural parts): no Drawing: no Weld procedures: no Nondestructive Testing (X-ray: 10%): no Notified body inspection: no			
Construction materials Body: S235 JR G2 (St.37) Connections: S235 JR G2 (St.37) Fittings: S235 JR G2 (St.37) Flanges (EN 1092-1 PN16): C22.8 Heads: S235 JR G2 (St.37) Spirotube Tube: S235 JR G2 (St.37) Wire: Copper Solder: Tin(SnCu3) Paint: Standard Color: Yellow (RAL 1003) Dry Pocket: Copper Brass Magnet: Neodymium Drain valve: Nickerled brass		Dimensions: DN: 200 mm OD: 219.1 mm H: 1057 mm h: 767 mm D: 406 mm LF: 775 mm e: 1" mm u: 44 mm Volume: 115 ltr Dry weight (approx): 115 kg	
Subject to changes			