
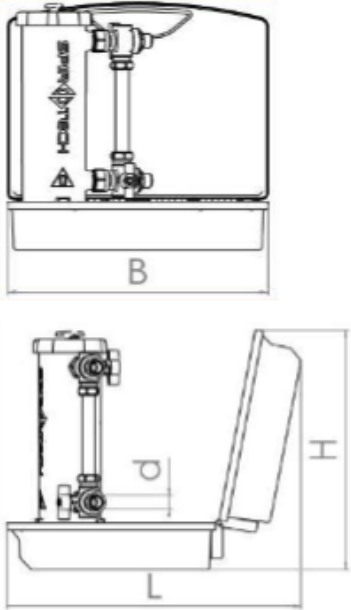


SPIROTECH Technical Data Sheet			
Product: Spiroplus RapidCleanse		Type:	CTR075
Customer:		Date: 22-1-2014	
Project:			
Reference:			
Design parameters: Medium: Water / glycol (max.50%) and most common additives Max. pressure: 3 bar-g Max. temperature: 65 °C		Drawing: 	
Testing and quality assurance: Leakage tests: yes Test medium: Water Test certificate: no			
Construction materials Body: PA6.6GF30 Bypass valves: Nickel plated brass Drain valve: Nickel plated brass Bypass pipe: RVS 316 Seals: EPDM Magnet: RVS covered Neodymium T-handle: Reinforced PA6 Case: PP Case inlay: ABS Camlock coupling: PP Hoses: Reinforced PVC		Dimensions: d Camlock or 3/4" L 470 mm B 420 mm H 450 mm L hoses ± 2,5 m	
		Volume: 2,2 ltr Dry weight case approx. 5,3 kg Dry weight hoses approx. 1,7 kg	
Subject to changes			