
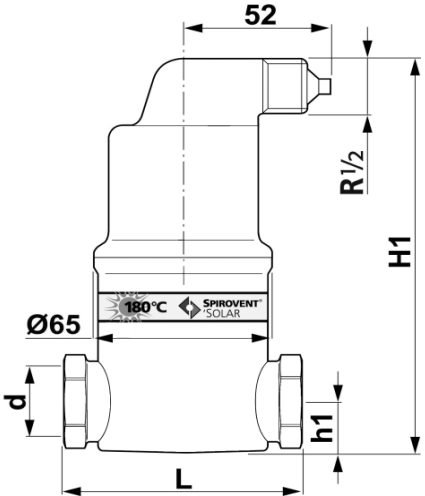


<b>SPIROTECH SPECIFICATION SHEET</b>		<b>SPIROTECH</b> 	
Version 17.10 / BDB			
Product: SpiroVent Solar AutoClose 3/4" Threated fitting		Type: AA075FBA08	
Customer:			
Project:		Date: 2/26/2018	
Reference:			
<b>Design criteria</b>		<b>Drawing:</b>	
Medium: Water / glycol (min 20% / max.50%)			
Max. flow velocity: 1 m/s			
Max. flow rate: 0.35 l/s			
Max. pressure: 10 bar-g			
Max. temperature: 180 °C			
closing temperature: 100 °C			
Design standard: EN 13445			
<b>Testing and quality assurance</b>			
Leakage test: yes			
Test certificate: no			
Design and manufacturing acc. 2014/68/EU: yes			
Material certificates (structural parts): no			
Drawing: no			
<b>Construction materials</b>		<b>Dimensions:</b>	
Body: Brass		d	
Deaeration cap: Brass		H1 153 mm	
Valve sealing: Viton		h1 20 mm	
Float: TPX		L 85 mm	
Spirotube Tube: Copper		Volume: 0.18 ltr	
Wire: Copper		Dry weight (approx): 1 kg	
Solder: Tin(SnCu3)			
		Subject to changes	