
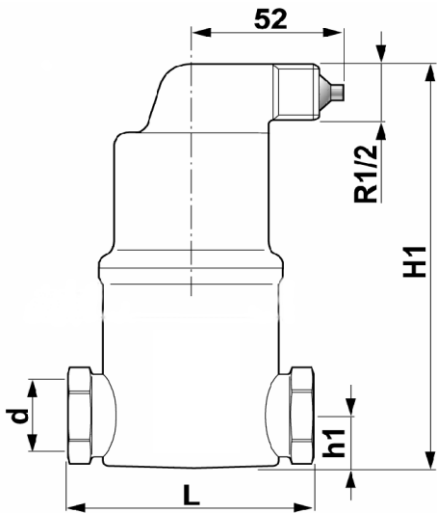


<b>SPIROTECH SPECIFICATION SHEET</b>		<b>SPIROTECH</b> 	
Version 16.1 / BDB			
Product: SpiroVent special 1¼" Threated fitting		Type: AA125-R002	
Customer:			
Project:		Date: 16-3-2016	
Reference:			
<b>Design criteria</b>		<b>Drawing:</b>	
Medium: Acc. supplier info Max. flow velocity: 1 m/s Max. flow rate: 3,60 m3/h Max. pressure: 10 bar-g Max. temperature: 180 °C Design standard: EN 13445			
<b>Testing and quality assurance</b>			
Leakage test: no Test certificate: no Design and manufacturing acc. 97/23/EC: yes Material certificates (structural parts): no Drawing: no			
<b>Construction materials</b>		<b>Dimensions:</b>	
Body: AISI316 Deaeration cap: AISI316 Valve sealing: Viton Float: TPX Spirotube Tube: AISI316 Wire: AISI316 Solder: Tin(SnCu3)		d: 1¼" H1: 200 mm h1: 40 mm L: 88 mm	
		Volume: 0,25 ltr Dry weight (approx): 1,4 kg	
Subject to changes			